


PIN ASSIGNMENT

P1	WIRE COLOR	P2	WIRE COLOR	P3	P4
1	RED	1	RED	1	JUMPER
2	WHITE	2	NC	2	JUMPER
3	GREEN	3	NC	3	JUMPER
4	BLACK	4	WHITE	4	JUMPER
G	SHELL	G	NC	G	JUMPER

ITEM	DESCRIPTION	Q'TY	UNIT
(9)	PVC: 45P BLACK	4	PCS
(8)	TUBE: $\phi 1.5 \times 8 \times 0.13$ mm BLACK	5	PCS
(7)	JUMPER: WIRE: UL 1007 28AWG L=15mm	1	E/A
(6)	P2: USB 4P B/M 黑膠 端子鍍金 30U", 鐵殼鍍銀	1	E/A
(5)	P4: USB 4P A/F 白膠 端子鍍金 30U", 鐵殼鍍銀	1	E/A
(4)	P3: USB A/M 白膠 短身三件式 30U"	1	E/A
(3)	P1: USB A/M 白膠 端子鍍金 30U"	1	E/A
(2)	CABLE: OD= $\phi 3.0$ 28AWG*2C UL20276 外被PVC BLACK	1/2	PCS
(1)	CABLE: OD= $\phi 4.5$ 28AWG*1P+24AWG*2C+ AEB UL2725 外被PVC BLACK (2.0REV)	1&1/2	PCS

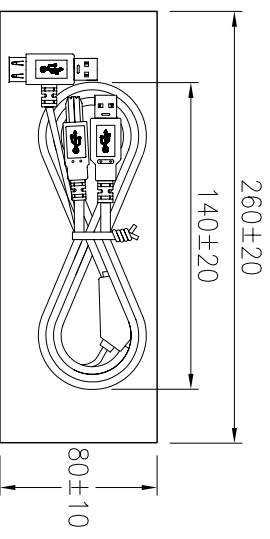

PACKED

REV.	REV. RECORD	DATE
A	NEW RELEASE (D00025N)	12/14/04"
B	ADD P3 & P4 PVC	12/15/04"
C	CHANGE P4 DESIGN	12/16/04"
D	ADD G	01/23/06"

DR.	RE.	APP.
KELLY		

LONG CHU ELECTRONICS CO. LTD
龍竹企業股份有限公司

DESCRIPTION: USB A/M TO USB A/F+USB A/M TO USB B/M

GENERAL TOLERANCE	SIZE	P/N
0. \pm .50	A4	WUBBG-M/UBA-M+AD-UBA-M/F-1200
0.0 \pm .30	SCALE	REV.
0.00 \pm .20	---	D