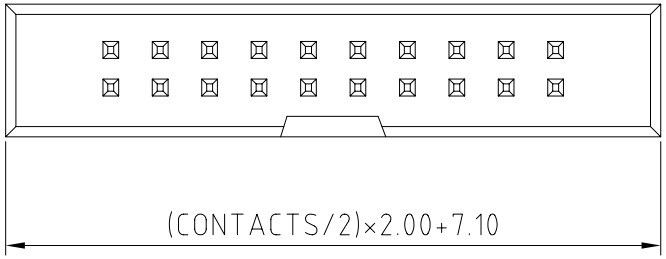

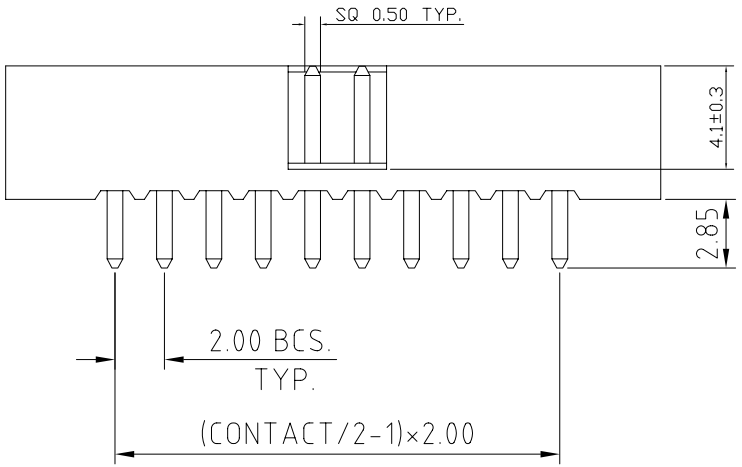

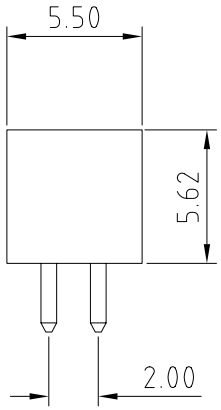

FEATURES

Available in 10-68 circuits

MATERIAL

Contact material: Brass
Insulator Material:Polyester Glass Fiber(UL 94 V-0)

FINISH

Contact Plated: Gold over Nickel

SPECIFICATIONS

Current Rating: 1A
Insulation resistance: 5000 M Ω min
Contact resistance: 20 m Ω max
Dielectric withstanding voltage: 500 VAC/DC
Operating Temperature: -40°C to 105°C

Part No. System

MM2532X - XX

- No.of circuits
- □:Normal Part / G:ROHS Part / V:Lead free
- Base No.

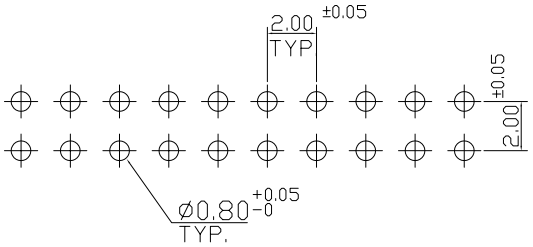

RECOMMENDED PCB LAYOUT

LONG CHU ELECTRONICS CO. LTD

LCU 龍竹企業股份有限公司

			MATERIAL: SEE LIST	UNIT: mm	DESCRIPTION: 2.00mm Low Profile Header (Box Header)
			DR. NORETA	RE.	GENERAL TOLERANCE: 0. =±.50, 0.0 =±.30, 0.00 =±.20, 0.° =±5°, 0.0°=±1°
A	NEW RELEASE	10/25/05'	CHK.	APP.	SIZE: A4 / P/N: MM2532 series / SCALE: 1.6/1 / REV.: A / SHEET NO.: 40022A
REV.	REV. RECORD	DATE			