

RECOMMENDED PCB LAYOUT

MATERIAL

Contact material: Brass

Insulator Material: Thermoplastic, UL 94 V-0

FINISH

Contact Plated: Gold over Nickel

SPECIFICATION

Current Rating: 1A

Voltage Rating: 250V AC

Insulation resistance: 5000 M Ω min


Contact resistance: 20 m Ω max

Dielectric withstanding voltage: 500 VAC/DC

Operating Temperature: -45°C to 105°C

Part No. System

MM2532X - XX - XX - ST155

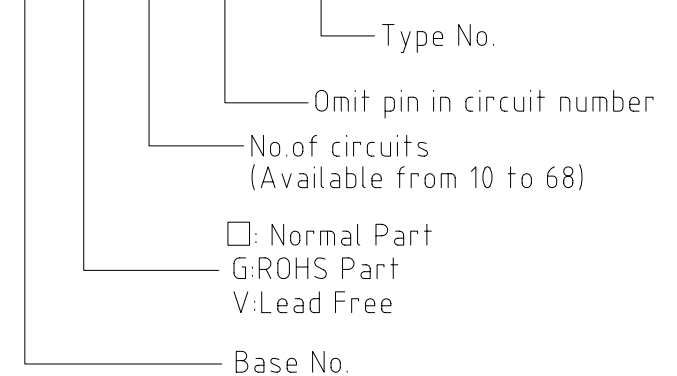

LONG CHU ELECTRONICS CO. LTD

LCU 龍竹企業股份有限公司

| | | | | | | | |
|------|-----------------------|----------|----------|------|--|-------|---------------------|
| | | | MATERIAL | UNIT | DESCRIPTION: | | |
| | | | SEE LIST | mm | 2.00mm Low Profile Header (Box Header) | | |
| B | PART NO SYSTEM CHANGE | 07/11/06 | DR. | RE. | GENERAL TOLERANCE | SIZE | P/N |
| A | NEW RELEASE | 11/17/05 | NORETA | APP. | 0. =±.50 0.° =±5° | A4 | MM2532-ST155 series |
| REV. | REV. RECORD | DATE | CHK. | | 0.0 =±.30 0.0° =±1° | SCALE | REV. SHEET NO. |
| | | | | | 0.00 =±.20 | 1.6/1 | B 40024A |