


Features:

- * Available in 10-64 circuits
- * Current Rating:3Amps
- * Insulator resistance:5000 M ohm min
- * Contact resistance:20m ohm max
- * Dielectric withstanding voltage:500VAC
- * Operating Temperature:-40°C to 105°C
- * Fully shrouded
- * Insulator material:P.B.T+30% glass fiber(UL94 V-0)
- * Contact Plated:Gold over nickel
- * Mates with LCU M2540

Part No. System

M2532-XX-X-X

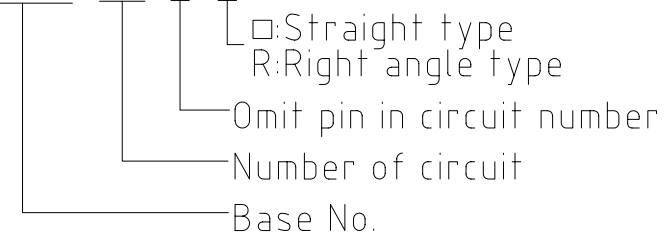

Ordering and Dimensional Information-(mm)

Part No.	Part No.	Circuits	Header Dimensions		
			A±0.2	B±0.2	C±0.2
M2532-06	M2532-06-R	06	15.24	12.94	5.08
M2532-08	M2532-08-R	08	17.78	15.48	7.62
M2532-10	M2532-10-R	10	20.30	18.10	10.16
M2532-12	M2532-12-R	12	22.84	20.64	12.70
M2532-14	M2532-14-R	14	25.38	23.18	15.24
M2532-16	M2532-16-R	16	27.92	25.72	17.76
M2532-20	M2532-20-R	20	33.00	30.80	22.86
M2532-24	M2532-24-R	24	38.08	35.88	27.94
M2532-26	M2532-26-R	26	40.62	38.42	30.48

Part No.	Part No.	Circuits	Header Dimensions		
			A±0.2	B±0.2	C±0.2
M2532-30	M2532-30-R	30	45.70	43.50	35.56
M2532-34	M2532-34-R	34	50.78	48.58	40.64
M2532-40	M2532-40-R	40	58.40	56.20	48.26
M2532-44	M2532-44-R	44	63.48	61.28	53.34
M2532-50	M2532-50-R	50	71.10	68.90	60.96
M2532-56	M2532-56-R	56	78.72	76.52	68.58
M2532-60	M2532-60-R	60	83.80	81.60	73.66
M2532-64	M2532-64-R	64	88.88	86.88	78.74

LONG CHU ELECTRONICS CO. LTD

LCU 龍竹企業股份有限公司

			MATERIAL	UNIT	DESCRIPTION:		
			SEE LIST	mm	2.54mm Low Profile Header(Box Header)		
			DR.	RE.	GENERAL TOLERANCE	SIZE	P/N
A	NEW RELEASE	3/21/02"	nina chen		0. =±.50 0.° =±5°	A4	M2532-2*5-R SERIES
REV.	REV. RECORD	DATE	CHK.	APP.	0.0 =±.30 0.0° =±1°	SCALE	REV. SHEET NO.
					0.00 =±.20	---	A