
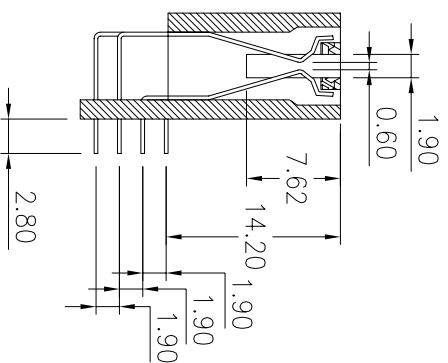


**MATERIAL**  
 HOUSING: THERMOPLASTIC, UL 94V-0  
 CONTACT: COPPER ALLOY  
**FINISH**  
 CONTACT: GOLD FLASH  
**SPECIFICATIONS**  
 VOLTAGE CURRENT RATING: 1A, 30V AC  
 INSULATION RESISTANCE: 1000M $\Omega$ MIN.  
 CONTACT RESISTANCE: 30m $\Omega$ MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE  
 TEMPERATURE RATING: -55°C TO +105°C

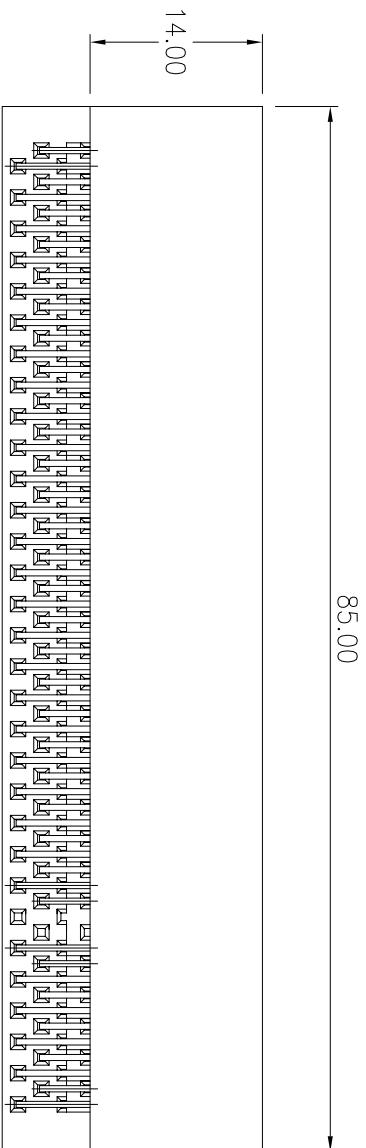

**HOW TO ORDER**

SPCIX - XX - X

R: right angle type


No. of circuit

□: Normal Part

G: ROHS Part

V: For Lead Free Process

Base No.

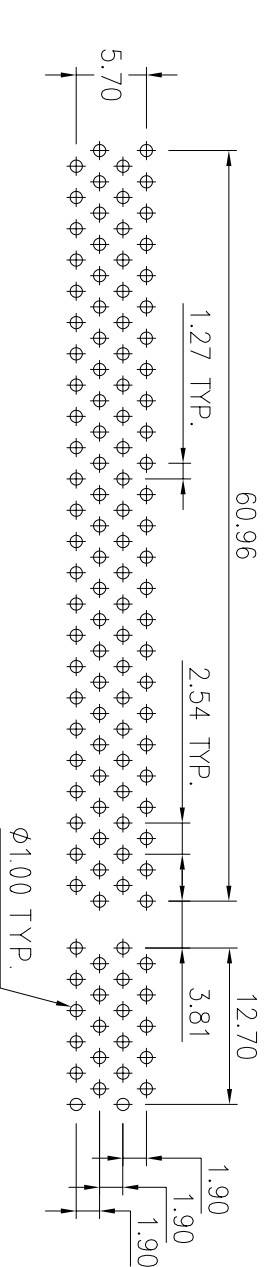

**RECOMMENDED PCB LAYOUT**

**LONG CHU ELECTRONICS CO. LTD**  
**LCU** 龍竹企業股份有限公司

MATERIAL  
SEE NOTE

UNIT  
mm

DESCRIPTION:  
1.27mm SLOT PCI CONNECTOR RIGHT ANGLE TYPE

REV.	REV. RECORD	DATE	DR. KELLY	CHK.	RE. APP.
A	NEW RELEASE	12/11/02*			
B	DESIGN CHANGE	5/31/04*			

GENERAL TOLERANCE	SIZE	P/N
0. $\pm 0.50$	A4	SPCI-120-R
0.0 $\pm 0.30$	SCALE	REV. B
0.00 $\pm 0.20$	---	SHEET NO.