


A=2.00×(No. of Contact/2-1)×2.00  
 B=2.00×(No. of Contact/2)×2.00+0.6  
 C=2.00×(No. of Contact/2-2)×2.00

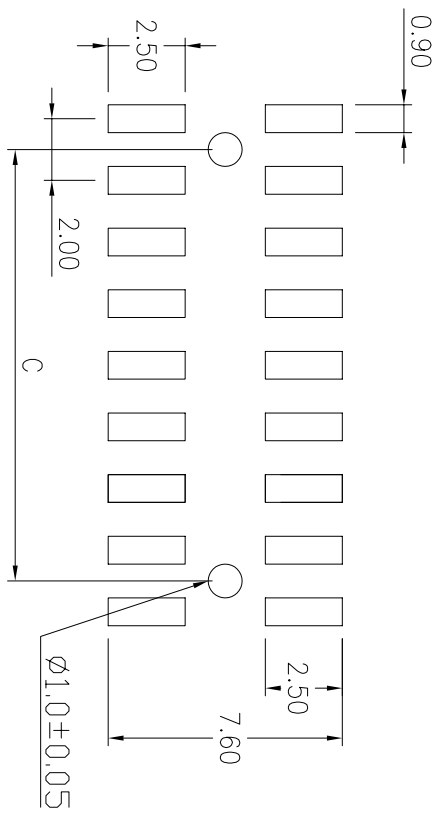

**MATERIAL**  
 Contact material: Brass  
 Insulator Material: Polyester, UL 94 V-0

**FINISH**  
 Plated: gold flash

**SPECIFICATIONS**  
 Current Rating: 1AMPS  
 Insulation resistance:1000 MΩ min.  
 Dielectric withstanding Voltage: 500 VAC/DC  
 Operating Temperature: -45°C to +105°C  
 Contact resistance:20m Ω max.

**HOW TO ORDER**

MM2554X - XX - SMT - X  
 □:W/O LOCATING PEG  
 I: WITH LOCATING PEG  
 NUMBER OF CIRCUIT  
 □:NORMAL PART  
 G:ROHS PART  
 V:For Lead free process  
 BASE NO.

**Recommended P.C.Board SMT Layout**

REV.	DESCRIPTION	DATE	MATERIAL	UNIT	DESCRIPTION:	SIZE	P/N:	SHEET NO.
			SEE NOTE	Mm	2.0mm Dual Row Female Header	A4	MM2554-SMT SERIES	
			DR. NORETA-	RE.	GENERAL TOLERANCE	0.1 ±.50	0.1° ±.5°	
			CHK.	APP.	0.0 ±.30	0.0° ±.1°		
					0.00 ±.20			

**LONG CHU ELECTRONICS CO. LTD**  
**LCU** 龍竹企業股份有限公司