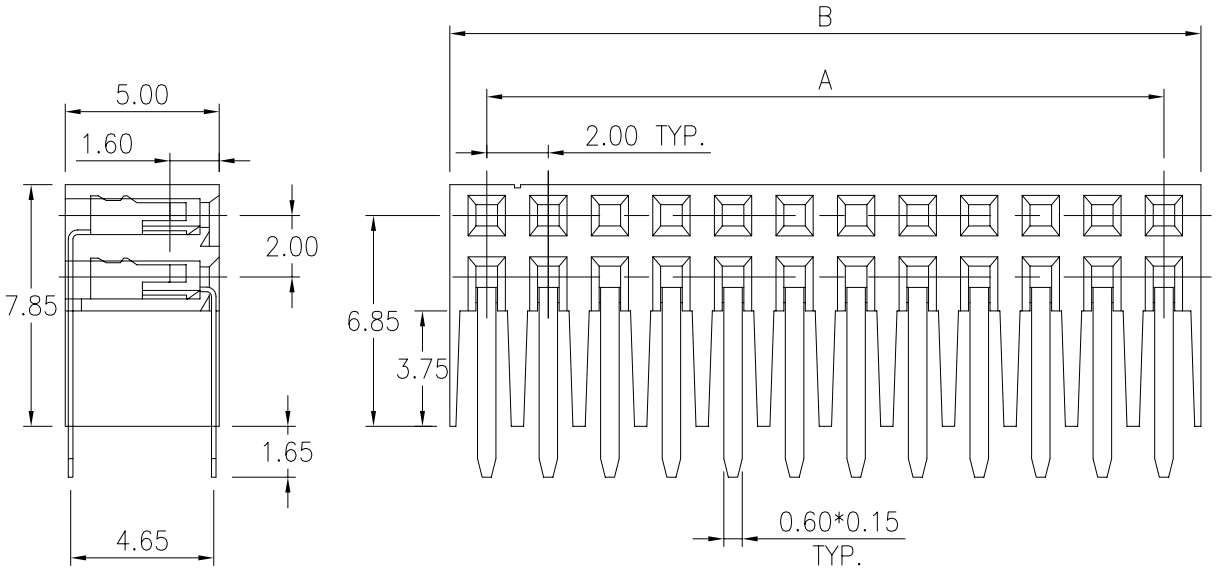

A=2.00×(No. of Contact/2-1)

B=2.00×(No. of Contact/2)

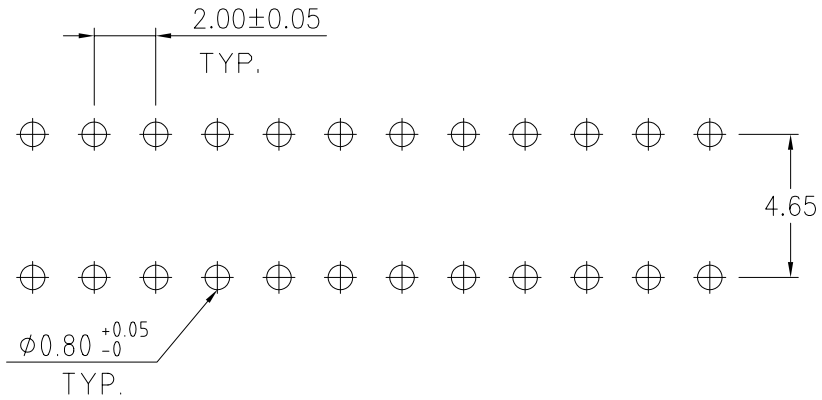

RECOMMENDED PCB LAYOUT

MATERIAL

Contact material: Brass

Insulator Material: Polyester, UL 94 V-0

FINISH

Contact: Gold Plated over 50μ" Nickel

SPECIFICATIONS

Current Rating: 1AMPS

Insulation resistance: 1000 MΩ min.

Dielectric withstanding Voltage: 500 VAC/DC

Operating Temperature: -45°C to +105°C

Contact resistance: 20m Ω max.

Voltage Rating: 250V AC

HOW TO ORDER

MH305HX-XX

- XX: Number of circuit
- X: □:Normal Part, G:ROHS Part, V:For Lead Free Process
- MH305H: Base No.

LONG CHU ELECTRONICS CO. LTD

LCU 龍竹企業股份有限公司

REV.	REV. RECORD	DATE

MATERIAL	SEE NOTE
UNIT	mm
DR.	nina chen
RE.	
CHK.	
APP.	

DESCRIPTION: 2.0mm Dual Row Side Entry Female Header, H=7.85mm

GENERAL TOLERANCE: 0. =±.50, 0.° =±5°, 0.0 =±.30, 0.0°=±1°, 0.00 =±.20

SIZE	P/N	
A4	MH305H SERIES	
SCALE	REV.	SHEET NO.
--	A	