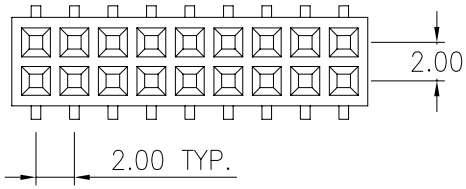

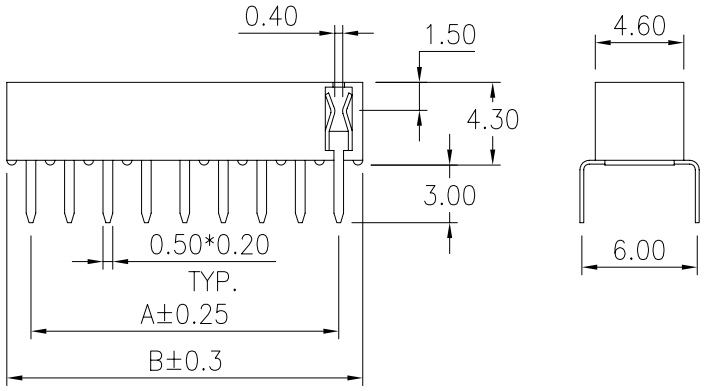

A=2.00*(No. of Pin/2-1)
B=2.00*(No. of Pin/2)+0.4

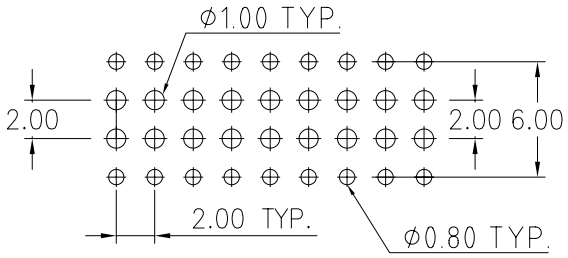

RECOMMENDED PCB LAYOUT

FEATURES

Available in 04-40 circuits
Mate with 2.0mm pitch & 0.5mm sq pin header

MATERIAL

Contact material: Brass
Insulator Material: Polyester,UL 94 V-0

FINISH

Plating: Gold flash(Std),or option available

SPECIFICATIONS

Current Rating: 1AMPS
Insulation resistance:1000 MΩ min.
Dielectric withstanding Voltage: 500 VAC/DC
Operating Temperature: -45°C to +105°C
Contact resistance:20m Ω max.

HOW TO ORDER

MH308X - XX - X
- TYPE NO.
- NO. OF CIRCUIT
- □:NORMAL PART
G:ROHS PART
V:FOR LEAD FREE PROCESS
- BASE NO.

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

REV.	DESCRIPTION	DATE	MATERIAL: SEE NOTE	UNIT: mm	DESCRIPTION: 2.0mm Dual Entry Female Header		
			DR.: NORETA-	RE.	GENERAL TOLERANCE: 0. =±.50, 0.° =±5°, 0.0 =±.30, 0.0° =±1°, 0.00 =±.20	SIZE: A4	P/N: MH308 SERIES
			CHK.	APP.		SCALE: --	REV.: A / SHEET NO.