


A=2.00×(No. of Contact/2-1)×2.00
 B=2.00×(No. of Contact/2)×2.00+0.6
 C=2.00×(No. of Contact/2-2)×2.00

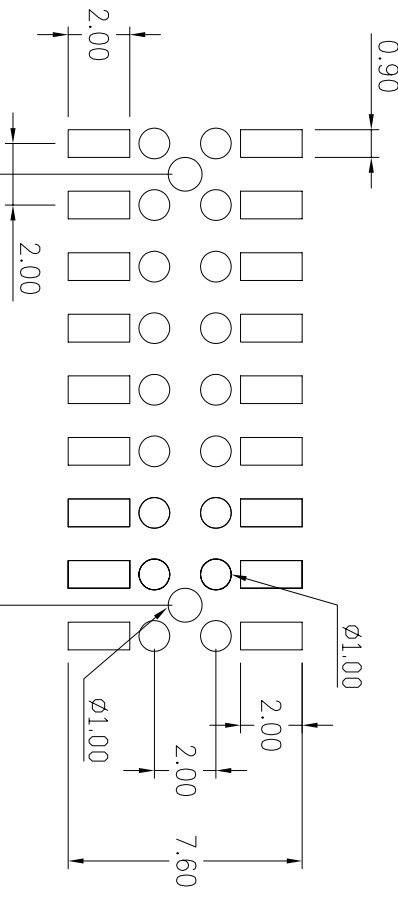

Recommended P.C.Board
 SMT Layout

FEATURES

Available in 04-40 circuits
 Mate with 2.0mm pitch & 0.5mm sq pin header

MATERIAL

Contact material: Brass
 Insulator material: Nylon 6T or LCP, UL94V-0

FINISH

Plating: Gold flash(Std), or option available

SPECIFICATIONS

Current Rating: 1AMPS
 Insulation resistance:1000 MΩ min.
 Dielectric withstanding Voltage: 500 VAC/DC
 Operating Temperature: -45°C to +105°C
 Contact resistance:20m Ω max.

HOW TO ORDER

MH308X-XX-XX
 NO. OF CIRCUIT TYPE NO.
 □:NORMAL PART
 G:ROHS PART
 V:FOR LEAD FREE PROCESS
 BASE NO.

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

REV.	DESCRIPTION	DATE	MATERIAL	UNIT	DESCRIPTION:	SIZE	TITLE:
			SEE NOTE	M	2.0mm Dual Entry Female Header SMT Type	A4	MH308-SMT SERIES
			DR. NINA CHEN	RE.	GENERAL TOLERANCE	SCALE	REV. SHEET NO.
			CHK.	APP.	0. ±.50 0.0 ±.30 0.00 ±.20	--	A