


A=2.54×(No. of Contact-1)
 B=2.00×(No. of Contact)

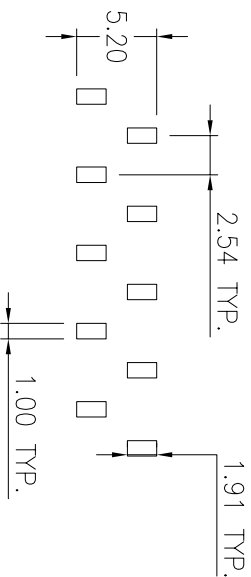

RECOMMENDED PCB LAYOUT

MATERIAL

Contact material : Brass
 Insulator Material : Thermoplastic, UL94V-0

FINISH


Plating: Gold plating

SPECIFICATIONS

Current Rating: 3AMPS
 Insulation resistance:1000 MΩ min.
 Dielectric withstanding Voltage: 500 VAC/DC
 Operating Temperature: -45°C to +105°C
 Contact resistance:20m Ω max.

HOW TO ORDER

M2552X-XX-SMT-XX

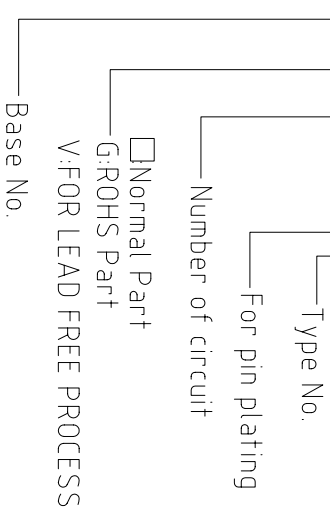

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

MATERIAL		UNIT		DESCRIPTION:	
SEE NOTE		mm		2.54mm SMT FEMALE HEADER	
DR.	NDRETA-	RE.		GENERAL TOLERANCE	SIZE
CHK.		APP.		0. ±±.50	A4
REV.				0.0 ±±.30	SCALE
				0.00 ±±.20	REV.
					A
					SHEET NO.