


A=2.54*(No. of Pin)-2.54
 B=2.54*(No. of Pin)+0.5

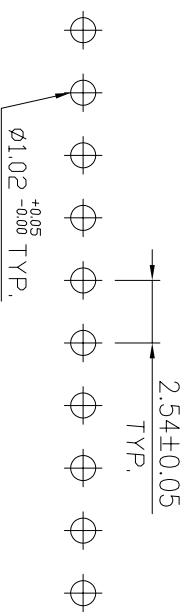

RECOMMENDED PCB LAYOUT

FEATURES

Available in 02-40 circuits
 Mates with dual row pin header

MATERIAL

Contact material: Brass
 Insulator Material : Thermoplastic, UL94V-0

FINISH


Plating: Gold Flash Over Nickel

SPECIFICATIONS

Current Rating: 3AMPS
 Insulation resistance:1000 MΩ min.
 Dielectric withstanding Voltage: 500 VAC/DC
 Operating Temperature: -45°C to +105°C
 Contact resistance:20m Ω max.
 Terminal material to be phosphor bronze with gold flash plated option available

HOW TO ORDER

M2552X-X-X-P5

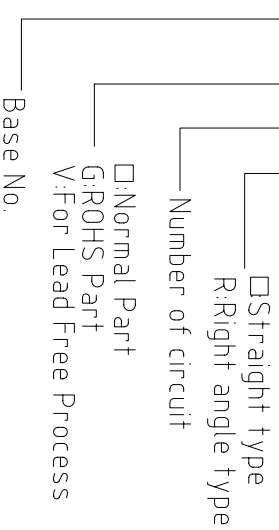

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

MATERIAL

SEE LIST

UNIT

mm

DESCRIPTION:

2.54mm Single Row Female Header(P=5.00mm)

DR.

nina chen

RE.

APP.

CHK.

REV.	REV. RECORD	DATE

GENERAL TOLERANCE	SIZE	P/N	SHEET NO.
0. ±0.50	A4	M2552 SERIES	
0.0 ±0.30	SCALE	REV. 0	
0.00 ±0.20			