


A=2.54×(NO. OF PIN/2-1)
B=2.54×(NO. OF PIN/2)+0.5

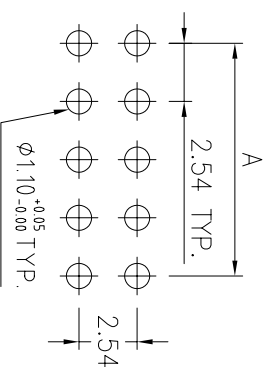

RECOMMENDED PCB LAYOUT

FEATURES

Low-profile 5.7mm high

Mates with dual row pin header

MATERIAL

Contact material: Brass

Insulator Material: Polyester, UL 94 V-0

FINISH

Plated: gold flash plated option available

SPECIFICATIONS

Current Rating: 3AMPS

Insulation resistance:1000 MΩ min.


Dielectric withstanding Voltage: 500 VAC/DC

Operating Temperature: -45°C to +105°C

Contact resistance:20m Ω max.

HOW TO ORDER

M2554X-XX-X

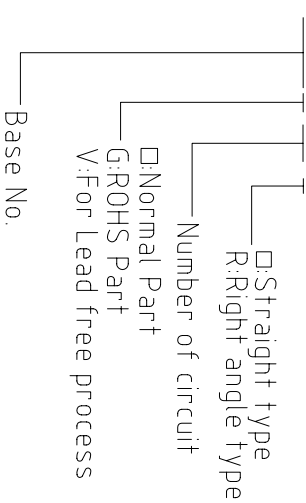

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

DESCRIPTION:

2.54mm Dual Row Female Header

MATERIAL	UNIT	DESCRIPTION:	SIZE	P/N	SHEET NO.
SEE LIST	mm	2.54mm Dual Row Female Header	A4	M2554-R SERIES	
DR. NORETA-	RE.	GENERAL TOLERANCE	SCALE	REV. A	
CHK.	APP.	0. ±±.50 0.0 ±±.30 0.00 ±±.20	---		
REV.	REV. RECORDED	DATE			