


A=2.54*(No. of Contacts/2-1)
 B=2.54*(No. of Contacts/2)+0.5

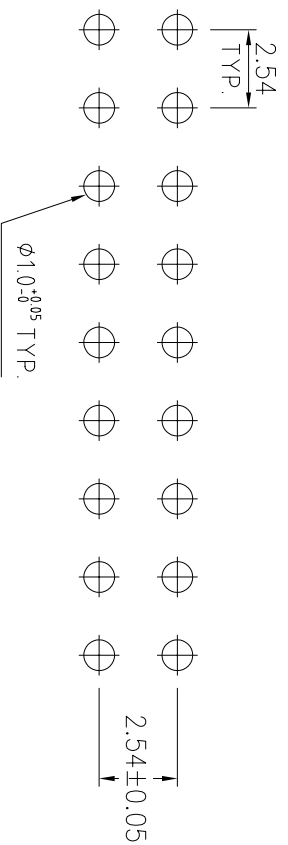

Recommended P.C.B Layout

FEATURES

Available in 02-80 circuits
 Mates with dual row pin header

MATERIAL

Contact material: Brass
 Insulator Material: Thermoplastic, UL 94 V-0

FINISH

Plated: gold flash plated option available

SPECIFICATIONS

Current Rating: 3AMPS
 Insulation resistance:1000 MΩ min.
 Dielectric withstanding Voltage: 500 VAC/DC
 Operating Temperature: -45°C to +105°C
 Contact resistance:20m Ω max.

Terminal material to be phosphor bronze with gold flash plated option available

HOW TO ORDER

M2554X-X-X-P5

HSG Height 5.0

- Straight type
- R:Right angle type
- Number of circuit
- Normal Part
- G:ROHS Part
- V:For Lead free process
- Base No.

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

MATERIAL	UNIT	DESCRIPTION:
SEE LIST	mm	2.54mm Dual Row Female Header(P=5.00mm)

DR.	RE.	GENERAL TOLERANCE	SIZE	P/N	SHEET NO.
NORETA	APP.	0. ±±.50 0.0 ±±.30 0.00 ±±.20	A4	M2554	SERIS
CHK.		0.0° ±±.1° 0.00° ±±.1°	SCALE	REV.	A
REV.	REV. RECORD	DATE			