


A=2.54×(NO. OF PIN)-1
 B=2.54×(NO. OF PIN)+0.50

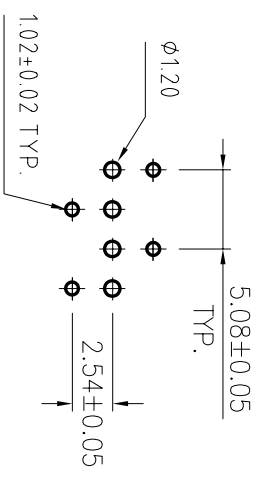

Recommended PCB Layout

MATERIAL

Contact material: Brass
 Insulator Material: Thermoplastic, UL 94 V-0


FINISH

Plated: gold flash plated option available

SPECIFICATIONS

Current Rating: 3AMPS
 Insulation resistance:1000 MΩ min.
 Dielectric withstanding Voltage: 500 VAC/DC
 Operating Temperature: -45°C to +105°C
 Contact resistance:20m Ω max.

HOW TO ORDER

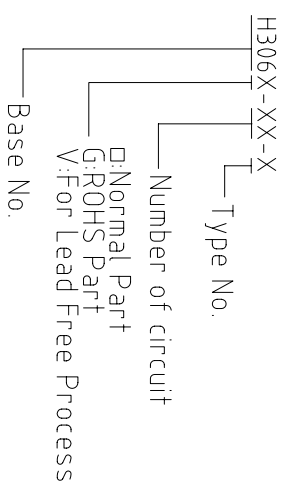

REV.	REV. RECORD	DATE	DR. JACKY	RE. APP.	DESCRIPTION:	SIZE	P/N	SHEET NO.
A	NEW RELEASE	3/30/98"	CHK.		2.54mm Single Row Female Header	A4	H306 SERIES	
					GENERAL TOLERANCE			
					0. ±.50			
					0.0 ±.30			
					0.00 ±.20			

LONG CHU ELECTRONICS CO. LTD
龍竹企業股份有限公司