

A=1.27×(No. of Contact/2-1)
 B=1.27×(No. of Contact/2-1)+1.67
 C=1.27×(No. of Contact/2-1)+3.04

Recommended P.C.Board
 SMD Layout

FEATURES
 Available in 06-40 circuits

MATERIAL

Contact material: Brass
 Insulator Material: Polyester, UL 94 V-0


FINISH

UNDERPLATING: NICKEL PLATING 40-60u" THK.
 OVERPLATING: GOLD PLATING 1~3u" THK.

SPECIFICATIONS

Current Rating: 1AMPS
 Insulation resistance:500 MΩ min.
 Dielectric withstanding Voltage: 500 VAC/DC
 Operating Temperature: -45°C to +105°C
 Contact resistance:20m Ω max.

HOW TO ORDER

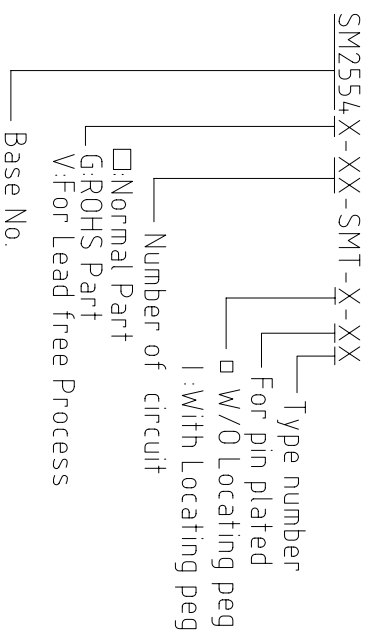

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

DESCRIPTION:
1.27mm Dual Row Female Header

MATERIAL	UNIT	GENERAL TOLERANCE	SIZE	P/N	SHEET NO.
SEE NOTE	mm	0. ±±.50 0.0 ±±.30 0.00 ±±.20	A4	SM2554 SERIES	
DR. NINA CHEN	RE.	0.° ±±.5° 0.0° ±±.1°	SCALE	REV. A	
CHK.	APP.				
REV.	REV. RECORD	DATE			