


A=2.00*(No. of Pin/2-1)
B=2.00*(No. of Pin)

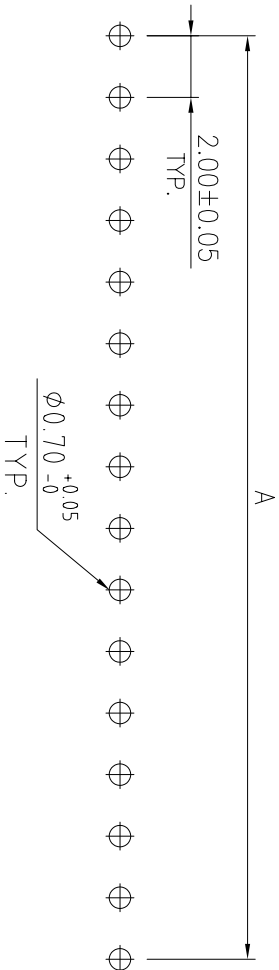

FEATURES

Available in 04-40 circuits
Low-profile 4.3mm high
Mates with 2.0mm pitch & 0.5mm pin Header

MATERIAL

Contact material: Brass
Insulator Material: Polyester, UL 94 V-0


FINISH

Contact: Tin / Gold Plated options available

SPECIFICATIONS

Current Rating: 1AMPS
Insulation resistance: 1000 MΩ min.
Dielectric withstanding Voltage: 500 VAC/DC
Operating Temperature: -45 °C to +105 °C
Contact resistance: 20m Ω max.

HOW TO ORDER

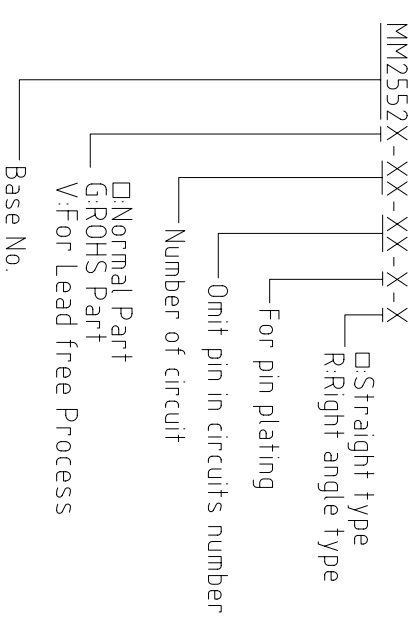

RECOMMENDED PCB LAYOUT

REV.	REV. RECORD	DATE	MATERIAL SEE LIST	UNIT mm	DESCRIPTION: 2.00mm Single Row Female Header	GENERAL TOLERANCE 0. ±0.50 0.0 ±0.30 0.00 ±0.20	SIZE A4	P/N MM2552-R SERIES
DR.	IVY	LIN	RE.	APP.	0. ° ±5° 0.0 ° ±1°	SCALE --	REV. B	SHEET NO.
CHK.								

LONG CHU ELECTRONICS CO. LTD
龍竹企業股份有限公司