

**FEATURES**

- \* Mates with LCU P125 series
- \* Accepts with LCU T125 contact terminal


**MATERIAL**

\* Insulator Material : Nylon 66, UL 94 V-0

**SPECIFICATION**

- \* Current Rating: 1A
- \* Insulation resistance: 100MΩ min
- \* Current resistance: 20mΩ max
- \* Dielectric withstanding Voltage: 250V AC/DC
- \* Operating Temperature: -20° to 85°C

**HOW TO ORDER**

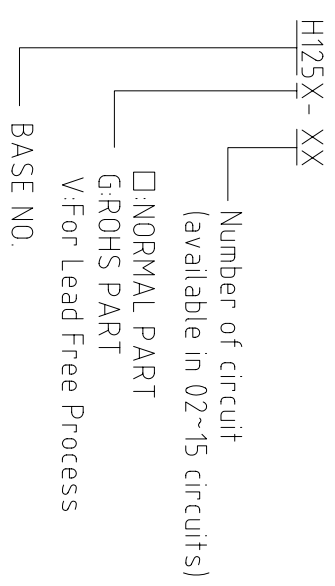

**Ordering and Dimensional Information**

Part No.	Circuits	Dim."A"	Dim."B"
H125-02	2	2.95	4.25
H125-03	3	4.20	5.60
H125-04	4	5.45	6.75
H125-05	5	6.70	8.00
H125-06	6	7.95	9.25
H125-07	7	9.20	10.50
H125-08	8	10.45	11.75

Part No.	Circuits	Dim."A"	Dim."B"
H125-09	9	11.70	13.00
H125-10	10	12.95	14.25
H125-11	11	14.20	15.50
H125-12	12	15.45	16.75
H125-13	13	16.70	18.00
H125-14	14	17.95	19.25
H125-15	15	19.20	20.50

MATERIAL		UNIT		DESCRIPTION:	
SEE LIST		mm		1.25mm Crimp Housing	
DR. KELLY		RE.		GENERAL TOLERANCE	
CHK.		APP.		0. ±±.50    0.° ±±5°	
DATE		5/13/04*		0.0 ±±.30    0.0° ±±1°	
REV.		A		SCALE 1/32	
NEW RELEASE		P/N		REV.	
		H125 series		SHEET NO.	
		A			

**LONG CHU ELECTRONICS CO. LTD**  
**龍竹企業股份有限公司**