

Ordering and Dimensional Information(mm)



Part No.	Dim. A	Dim. B	Dim. C
H2052-02-M	5.4	0.0	5.8
H2052-04-M	9.6	4.2	10.0
H2052-06-M	13.8	8.4	14.2
H2052-08-M	18.0	12.6	18.4
H2052-10-M	22.2	16.8	22.6
H2052-12-M	26.4	21.0	26.8
H2052-14-M	30.6	25.2	31.0
H2052-16-M	34.8	29.4	35.2
H2052-18-M	39.0	33.6	39.4
H2052-20-M	43.2	37.8	43.6
H2052-22-M	47.4	42.0	47.8
H2052-24-M	51.6	46.2	52.0

FEATURES
 Available in 02-24 circuits
 Mates with LCU H2052 series
 Accepts with LCU T2052-M series contact terminal

SPECIFICATIONS

Current Rating: 5A
 Insulation resistance: 1000MΩ min
 Dielectric withstanding Voltage: 250VAC/DC .
 Operating Temperature: -40°C to 105°C
 Insulator Material: Nylon 66, UL94 V-2 or 94 V-0

HOW TO ORDER

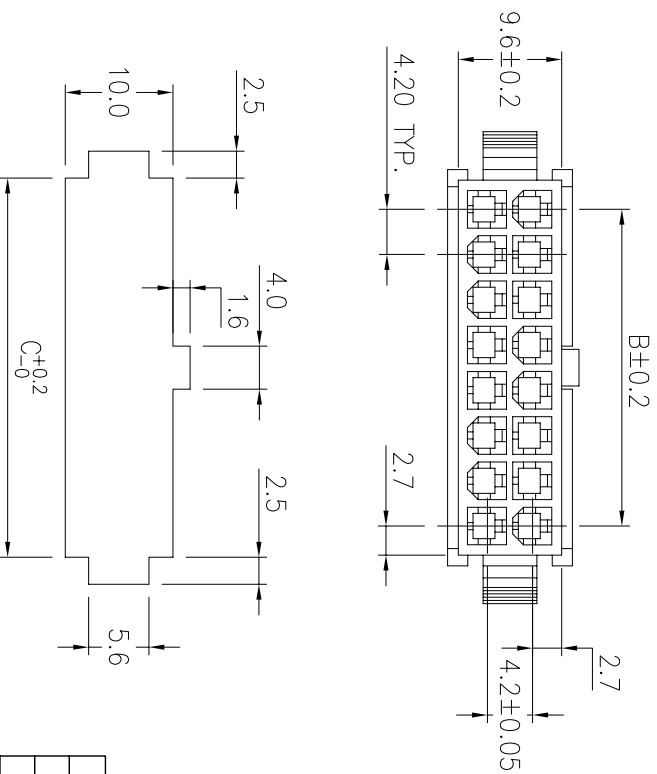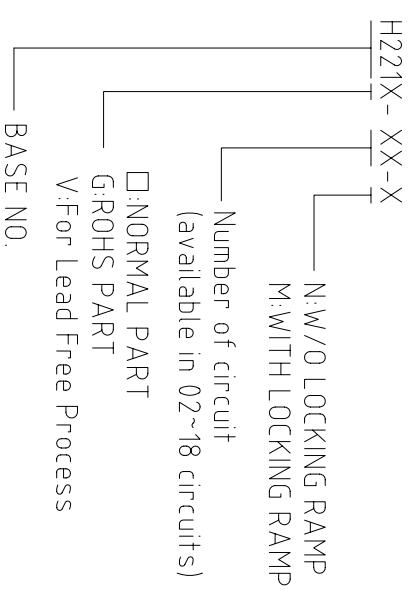

REV.	NEW RELEASE	REV. RECORD	DATE	MATERIAL	UNIT	DESCRIPTION	GENERAL TOLERANCE	SIZE	P/N	SHEET NO.
A	NEW RELEASE		1/25/02*	DR. KELLY	RE.	4.20mm Mini Fit Plug Housing	0. ±±.50 0.0 ±±.30 0.00 ±±.20	A4	H2052-M Series	
REV.				CHK.	APP.			SCALE	REV.	
								1/1	A	

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司