


RECOMMENDED PCB LAYOUT

MATERIAL

- INSULATOR: THERMOPLASTIC, UL94V-0
- CONTACT: PHOSPHOR BRONZE
- SHELL: SPCC
- LEG: BRASS
- RIVET: BRASS
- FINISH**
- SHELL: NICKEL PLATING
- CONTACT PLATING: DUPLEX OVER NICKEL PLATED
- SPECIFICATION**
- VOLTAGE RATING: 40 V (AC)
- CURRENT RATING: 1.5 AMP
- INSULATION RESISTANCE: 1000MΩ MIN. 500V DC.
- CONTACT RESISTANCE: 30mΩ MAX.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V
- TEMPERATURE RANGE: -20 °C~+80 °C

HOW TO ORDER

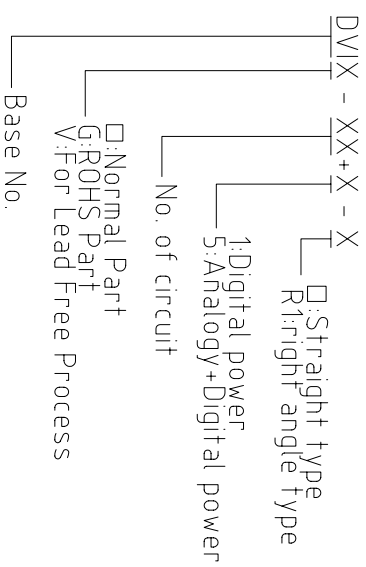

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

DESCRIPTION: **DVI FEMALE 90° TYPE**

		MATERIAL			
		SEE NOTE			
		DR.			
		KELLY			
		RE.			
		APP.			
REV.		NEW RELEASE	08/31/06		
		REV. RECORD	DATE		
GENERAL TOLERANCE		SIZE	P/N		
0. ±0.50	0.° ±5°	A4	DVI-24+1-R1		
0.0 ±0.30	0.0° ±1°	SCALE	REV.		
0.00 ±0.20		2.5/1	A	SHEET NO.	