※ The dimensions of "A,B,C"could be changed in accordance with customer needs .

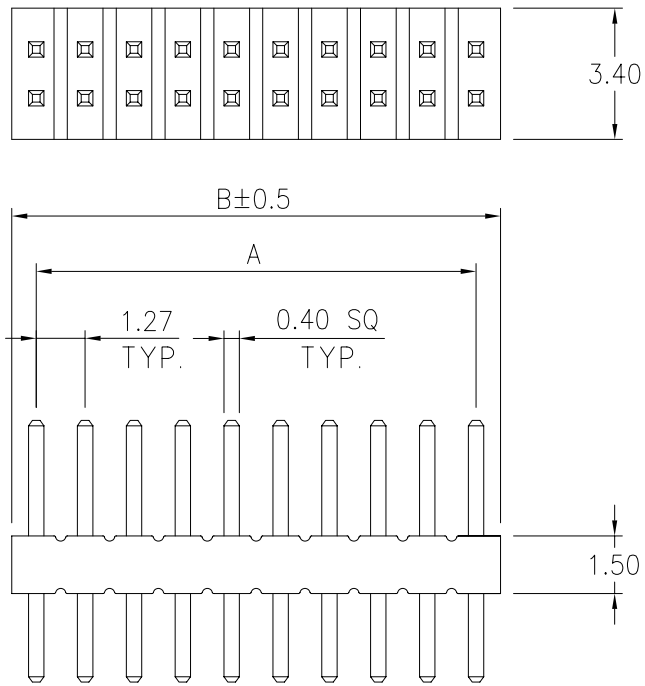

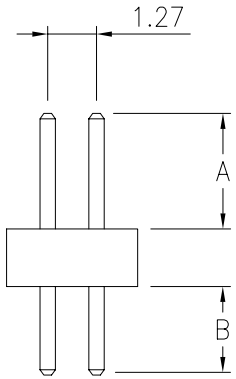

A=1..27*(No. of Pin/2−1)

B=1.27*(No. of Pin/2)

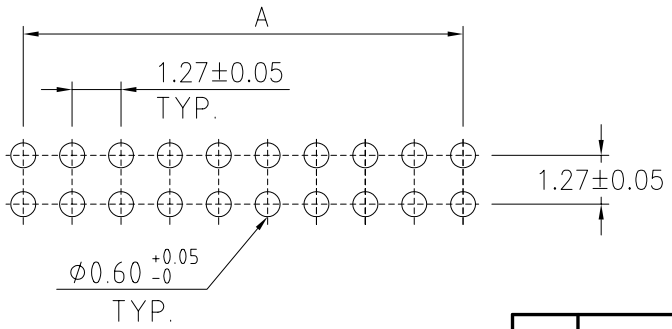

RECOMMENDED PCB LAYOUT

MATERIAL

Contact material: Brass

Insulator Material: Thermoplastic, UL 94 V-0

FINISH

Contact: Gold Flash

SPECIFICATIONS

Current Rating: 1AMPS

Insulation resistance: 1000 MΩ min.

Dielectric withstanding Voltage: 500 VAC/DC

Operating Temperature: -45°C to 105°C

HOW TO ORDER

SP302X-XX-X-XX

- Type number
- For pin plating
- Omit pin in circuit number
- Number of circuit
- □:Normal part / G:ROHS part / V:For lead free process
- Base No.

LONG CHU ELECTRONICS CO. LTD

LCU 龍竹企業股份有限公司

REV.	REV. RECORD	DATE	MATERIAL	UNIT	DESCRIPTION: 1.27mm Dual Row Pin Header		
			SEE NOTE	mm			
			DR. KELLY	RE.	GENERAL TOLERANCE 0. =±.50 0.° =±5° 0.0 =±.30 0.0°=±1° 0.00 =±.20	SIZE A4	P/N SP302 SERIES
			CHK.	APP.		SCALE --	REV. A / SHEET NO.