



RECOMMENDED PCB LAYOUT

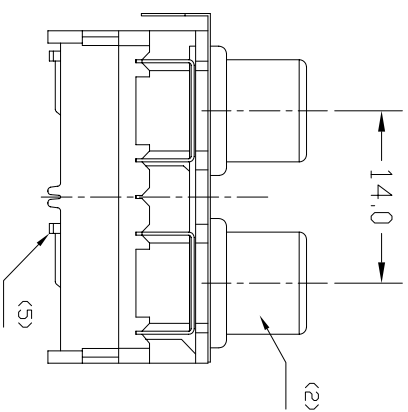

HOW TO ORDER
 AJX - 252VX-XX
 COLOR OPTION
 □:NON POST
 1:ADD POST
 TYPE NO.
 □:NORMAL PART
 G:ROHS PART
 V:FOR LEAD FREE PROCESS
 BASE NO.

BK:BLACK
 R:RED
 Y:YELLOW
 G:GREEN
 BL:BLUE
 W:WHITE
 04H:(A)RED, (B)WHITE
 (ANY COLOR CAN BE MADE)

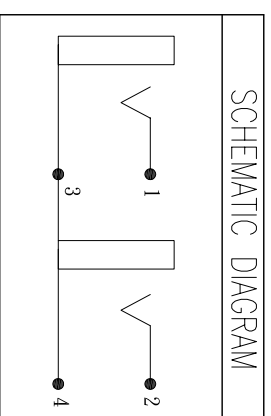

NO.	DESCRIPTION	Q'TY	MATERIAL	REMARK
(6)	TERMINAL	1	Brass t=0.4	NI:40-60 μ " THK.
(5)	TERMINAL	2	Phosphor Bronze t=0.4	TIN 100-150 μ " THK., NI:40-60 μ " THK.
(4)	SEALED PLATE	1	Brass t=0.3	NI:40-60 μ " THK.
(3)	WASHER	2	THERMOPLASTIC	UL94V-0
(2)	OUTER CONTACT	2	Brass t=0.4	NI:40-60 μ " THK.
(1)	HOUSING	1	THERMOPLASTIC	UL94V-0

LONG CHU ELECTRONICS CO. LTD
龍竹企業股份有限公司

DESCRIPTION:

PTN JACK

C	DIMENSION CHANGE	10/30/06*	MATERIAL	UNIT	mm
B	COLOR OPTION	10/19/06*	DR. KELLY	RE.	
A	NEW RELEASE (F00137)	07/28/06*	CHK.	APP.	
REV.	REV. RECORD	DATE			

GENERAL TOLERANCE	SIZE	P/N
0. \pm 0.50 0. \pm 5°	A4	AJ-252V1 SERIES
0.0 \pm 0.30 0.0 \pm 1°	SCALE	REV. C
0.00 \pm 0.20	1/6/1	SHEET NO.