


TYPE	A	B	C
	D	E	F
COLOR	GREEN	BLUE	RED
	YELLOW	WHITE	RED

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH
(1)	HOUSING	1	THERMOPLASTIC	UL94HB
(2)	WASHER	6	THERMOPLASTIC	UL94HB
(3)	COVER	3	THERMOPLASTIC	UL94HB
(4)	OUTER CONTACT	3	P-BRONZE 0.4 THK.	MB: Cu/Sn PLATED
(5)	TERMINAL	3	P-BRONZE 0.4 THK.	MB: Cu/Sn PLATED
(6)	TERMINAL	3	P-BRONZE 0.4 THK.	MB: Cu/Sn PLATED
(7)	SEALED PLATE	1	BRASS 0.3 THK.	MB: NI PLATED

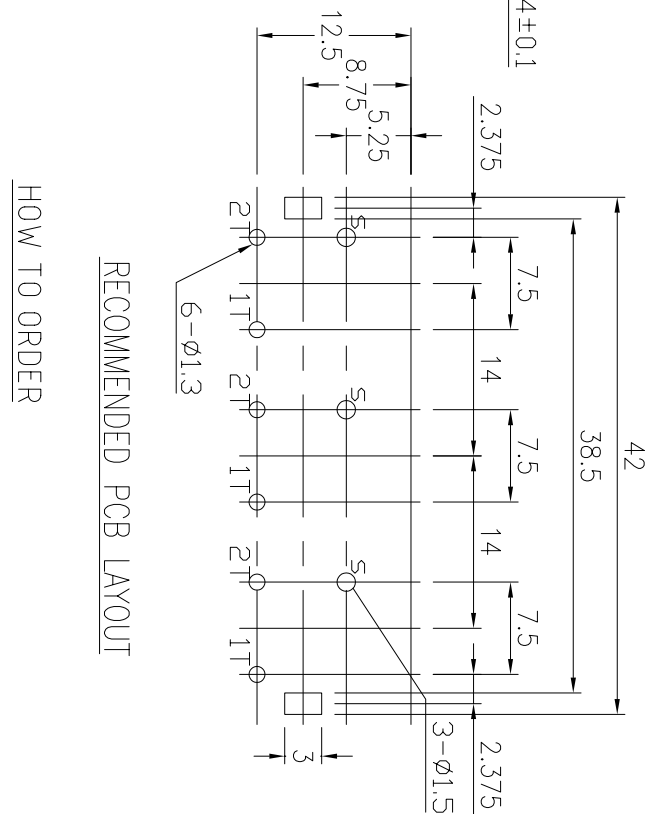

RECOMMENDED PCB LAYOUT

HOW TO ORDER

AJX-246-X/XX/XX/XX/XX


COLOR OPTION

BK:BLACK
 R:RED
 Y:YELLOW
 G:GREEN
 BL:BLUE
 W:WHITE
 O:ORANGE
 (ANY COLOR CAN BE MADE)


Type No.

□:Normal Part
 G:ROHS Part
 V:For Lead free Process

Base No.

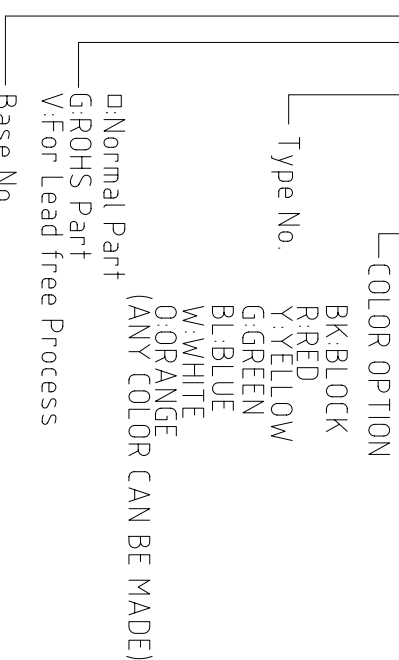

SCHEMATIC DIAGRAM

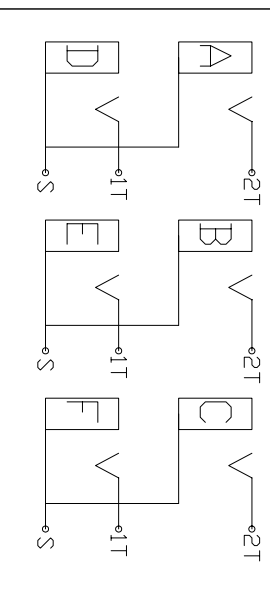

REV. A	NEW RELEASE	10/14/03*	DR. KELLY	RE. APP.	GENERAL TOLERANCE	SIZE	P/N
REV. B	REV. RECORD		CHK.		0. ± 0.50 0.0 ± 0.30 0.00 ± 0.20	A4	AJ-246 SERIES
						SCALE	REV. B
						1.6/1	SHEET NO.

LONG CHU ELECTRONICS CO. LTD
LCU
 龍竹企業股份有限公司

DESCRIPTION: PIN JACK