


RECOMMENDED HOLE PATTERN

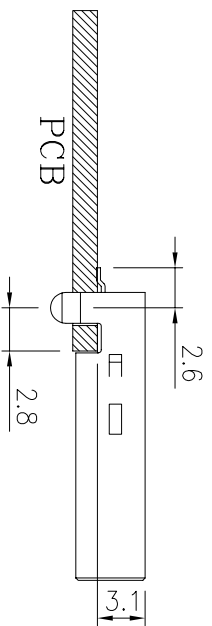

NOTES:

MATERIAL:

SHELL: STEEL t=0.3mm
 HOUSING: THERMOPLASTIC 30% GLASS FIBER UL 94V-0 RATED
 CONTACT: BRASS t=0.25mm

PLATING:

SHELL: NICKEL PLATED OVER Cu
 CONTACT: DUPLEX PLATED OVER ALL NICKEL

HOW TO ORDER

USP X-X-SMT-X

□: ROHS FOR LOW SPEED
 A: LEAD FREE FOR HIGH SPEED

SMT TYPE

A TYPE

□: NORMAL PART

G: ROHS PART
 V: FOR LEAD FREE PROCESS

BASE.No.

		MATERIAL	UNIT	DESCRIPTION	GENERAL TOLERANCE	SIZE	P/N
		SEE NOTE	mm		0. ±	A4	USP-A-SMT-A
DR.	RE.				0.0 ±±.20	SCALE	REV.
KELLY	APP.				0.0° ±±1°	--	A
CHK.					0.00 ±±.10		DRAWING NO.
							40520A
REV.	DESCRIPTION	DATE					
A	RELEASED (Z0004)	01/04/05*					

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業股份有限公司

USB A-TYPE (SMT) 公端