

RECOMMENDED P.C. BOARD HOLE LAYOUT

MATERIAL:

Contact Material: Phosphor Bronze
 Insulator material: Thermoplastic Glass fiber 30% (UL 94V-0)
 Shell material: Brass


FINISH:

Contact: Duplex flash over nickel plated
 Shell: nickel over Cu plated

SPECIFICATION:

Current Rating: 1 Amps
 Insulator resistance: 1000 M Ω min
 Contact Resistance: 30 m Ω max
 Dielectric Withstanding voltage: 500 VAC
 Operating Temperature: -25 $^{\circ}$ to 85 $^{\circ}$ C

HOW TO ORDER

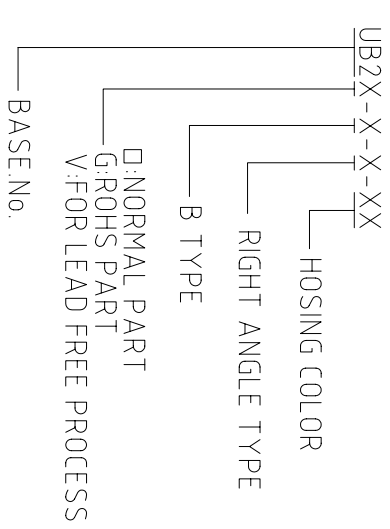

LONG CHU ELECTRONICS CO. LTD
龍竹企業股份有限公司

| | | | | | | | | | |
|----------|-------------|------|--|-----------------------|---------------|---------------|--------------|----------------|--------|
| MATERIAL | | UNIT | | DESCRIPTION: | | SIZE | | P/N: | |
| SEE NOTE | | MM | | USB B TYPE R/S SOCKET | | A4 | | UB2-B-R SERIES | |
| DR. | KELLY | RE. | | GENERAL TOLERANCE | 0. \pm .50 | 0. \pm .50 | 0. \pm .50 | REV. | A |
| CHK. | | APP. | | 0.0 \pm .30 | 0.0 \pm .30 | 0.0 \pm .30 | SCALE | SHEET NO. | 40116A |
| DATE | 07/31/07" | | | 0.00 \pm .20 | | | | | |
| REV. | DESCRIPTION | | | | | | | | |