


A=2.54x(NO. OF PIN)-2.54
 B=2.54x(NO. OF PIN/2)

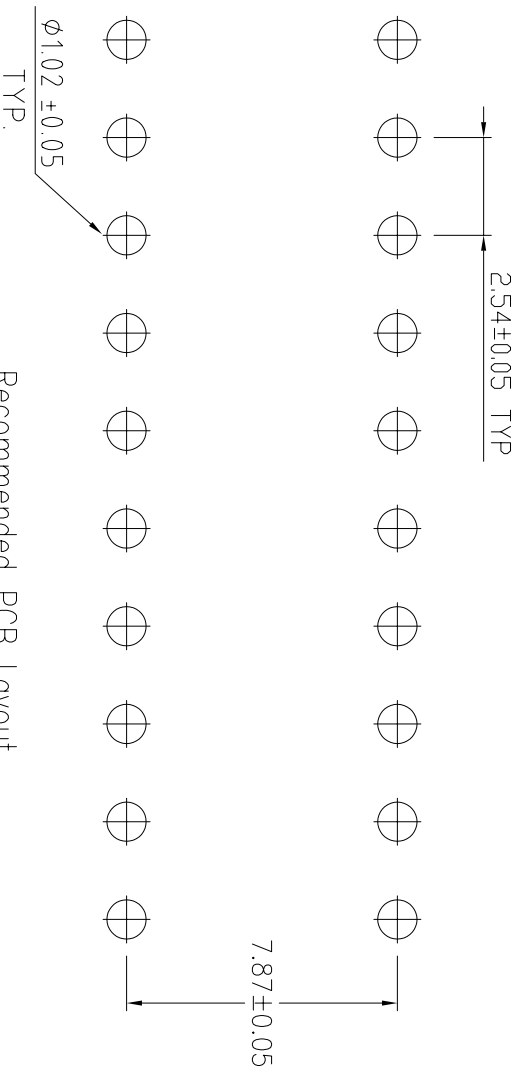

Recommended PCB Layout

MATERIAL

Contact material: Brass
 Insulator Material: Polyester, UL 94 V-0 Standard:P.B.T

SPECIFICATIONS

Current Rating: 3AMPS
 Insulation resistance:1000 MΩ min.
 Dielectric withstanding Voltage: 500 VAC/DC
 Operating Temperature: -45°C to +105°C
 Contact resistance:20m Ω max.
 Tuning fork contact type for low cost

HOW TO ORDER

H315X-XX-X
 Type No.
 Number of circuit
 □ Normal Part
 G:ROHS Part
 V:For Lead Free Process
 Base No.

LONG CHU ELECTRONICS CO. LTD
LCU 龍竹企業有限公司

MATERIAL		UNIT		DESCRIPTION:		SIZE		TITLE:	
SEE NOTE		MM		254mm Single Row Female Header, Side Entry Type		A4		H315 SERIES	
DR. T.V.V LIN		RE.		GENERAL TOLERANCE		SCALE		REV. A	
CHK.		APP.		0. ±.50 0.0 ±.30 0.00 ±.20		---		SHEET NO.	
DATE				06/09/04				A	
DESCRIPTION				NEW RELEASE					
REV.									